



UMS106A

Features

- Better additional short-term stability, up to $2.0E-14/1s$
- Ultra low phase noise $\leq -120\text{dBc}/\text{Hz}@1\text{Hz}$, $\leq -160\text{dBc}/\text{Hz}@1\text{kHz}$
- Low spurious $\leq -100\text{dBc}$

Applications


- Frequency standards and sources
- Measuring and calibration equipment
- Navigation

Technical Specifications

Input Sign specifications		
Frequency range	10MHz \pm 10Hz	
Wave form	Sine wave	
Power	10 \pm 2 dBm	
Harmonics	≤ -30 dBc	
Spurious	≤ -70 dBc	
Load	50 Ω \pm 5%	
Output Sign specifications		
Frequency range	60MHz \pm 60Hz	
Number of outputs	4	
Port to port isolation	≥ 50 dB	
Wave form	Sine wave	
Power	10 \pm 3 dBm	
Harmonics	≤ -40 dBc	
Spurious	≤ -80 dBc	≤ -100 dBc
Load	50 Ω \pm 5%	
Powe stability vs Temperature (-40°C to 70°C)	≤ 2.0 dB	
Additional short-term stability	$\leq 2 \times 10^{-14}/1s$	
Phase Noise (dBc/Hz)	Option: S	Option: U
1 Hz	-115	-120
10 Hz	-130	-135
100 Hz	-145	-150
1 KHz	-155	-160
10 KHz	-155	-160
Input voltage range		
	12 VDC \pm 5%	
Power consumption (at 25°C)	3W	
Vibration	MIL-STD-202G	
Size (L×W×H)	90×60×20mm ³	



Outline drawing and Electrical connections (mm)

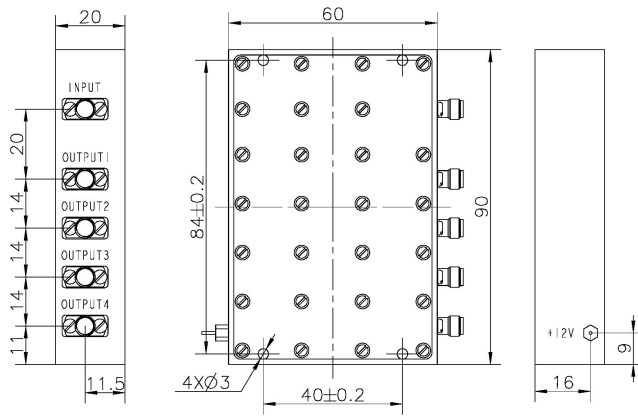

INPUT: 10MHz (SMA-F)
OUTPUT1: 60MHz (SMA-F)
OUTPUT2: 60MHz (SMA-F)
OUTPUT3: 60MHz (SMA-F)
OUTPUT4: 60MHz (SMA-F)
+12V: DC +12v

